

12-06-99

Attorney Docket No. 40725.830063.000
Express Mail Label No. EL415786719US

PATENT

IN THE U.S. PATENT AND TRADEMARK OFFICE

12/03/99
Jc511 U.S. PTO
09/454124
12/03/99

Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

This is a request for filing a _____ Non-Provisional Original X Utility _____ Design Patent Application, _____ Continuation _____ Divisional _____ Continuation-in-Part Application under 37 CFR 1.53(b), of pending prior application Serial No. _____ filed on _____ by _____ for _____ which is a _____ Application of prior application Serial No. _____ by JORMA ANTERO SEPPANEN for SIGNAL QUALITY INDICATOR APPARATUS AND METHOD PARTICULARLY USEFUL FOR MOBILE TELEPHONES from which priority is claimed.

Enclosed are:

- X An original specification, claims, drawings and Declaration and Power of Attorney.
- _____ A true copy of the prior application, including the specification, claims, drawings, oath or declaration, and any amendments referred to in the oath or declaration as originally filed. Any such amendments referred to in the oath or declaration filed to complete the prior application did not introduce new matter therein.
- _____ A preliminary amendment is enclosed to be entered in the new application after a filing date has been granted.
- _____ New formal drawings are enclosed.
- _____ A List of References.

The filing fee is calculated below:

The filing fee is calculated below:

(Col. 1)

(Col. 2)

| FOR: | NO. FILED | NO. EXTRA |
|---|-----------|-----------|
| BASIC FEE | | |
| TOTAL CLAIMS | 16 - 20 = | * 0 |
| INDEP CLAIMS | 3 - 3 = | * 0 |
| <input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED | | |

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

SMALL ENTITY

| RATE | FEE |
|--------|-------|
| | \$380 |
| x 9 = | \$ |
| x39 = | \$ |
| x130 = | \$ |
| TOTAL | \$ |

OR

OR

OR

OR

OR

OR

OTHER THAN A SMALL ENTITY

| RATE | FEE |
|--------|--------|
| | \$ 760 |
| x18 = | \$ 0 |
| x78 = | \$ 0 |
| +260 = | \$ 0 |
| TOTAL | \$ 760 |

X A check in the amount of \$ 760.00 is enclosed.

_____ Please charge Deposit Account No. 082623 in the amount of \$ _____.

_____ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Account No. 082623.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 082623. A duplicate copy of this sheet is attached.

X Any filing fees under 37 CFR 1.16 for the presentation of extra claims.

_____ Any patent application processing fees under 37 CFR 1.17.

_____ Cancel claims _____.

Priority under 35 U.S.C. 119 is claimed on the basis of prior _____ application Serial No. _____, filed on _____, A certified copy of this foreign application was previously filed in the parent application.

Amend the specification by inserting before the first line the sentence:

--This is a _____ continuation _____ division of co-pending application Serial No. _____, filed on _____.--

The prior application is assigned to _____.

The power of attorney in the prior application is to:

Francis A. Sirr, Reg. No. 17,265, Earl C. Hancock, Reg. No. 19,472, Lee R. Osman, Reg. No. 38,260, James A. Pinto, Reg. No. 40,774, Robert G. Crouch, Reg. No. 34,806, Robert H. Kelly, Reg. No. 33,922, Patrick T. McBride, Reg. No. 39,295, and Brian P. Kinnear, Reg. No. 43,717.

- a. _____ The power appears in the original papers of the prior application.
- b. _____ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. _____ Recognize as associate attorney and address all future communications to:

A verified statement that this filing is by a small entity:

_____ is attached.

_____ has been filed in the parent application and such status has been re-determined and is still proper and desired. (37 C.F.R. 1.28(a)).

Please forward all correspondence to:

Earl C. Hancock, Reg. No. 19,472
HOLLAND & HART LLP
555 Seventeenth Street, Suite 3200
P.O. Box 8749
Denver, Colorado 80201
Phone: (303) 473-2708
Fax: (303) 473-2720

Dated this 3RD day of DEC., 1999.

Respectfully submitted,




Earl C. Hancock, Reg. No. 19,472
Attorney for Applicant(s)
HOLLAND & HART LLP
555-17th St., Suite 3200
P.O. Box 8749
Denver, Colorado 80201
(303) 473-2708

PATENT
EXPRESS MAIL NO. EL415726719US
Attorney Docket No. 40725.830063.000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
JORMA ANTERO SEPPANEN) Group Art Unit: _____
Serial No. _____) Examiner: _____
Filed: Herewith)
For: SIGNAL QUALITY)
INDICATOR APPARATUS AND)
METHOD PARTICULARLY)
USEFUL FOR MOBILE)
TELEPHONES)



CERTIFICATE OF MAILING BY EXPRESS MAIL

Box PATENT APPLICATION
Assistant Commissioner
for Patents
Washington, D.C. 20231

Sir:

The undersigned hereby certifies that the following documents:

1. Transmittal Letter for Patent Application
2. Utility Patent Application
3. Combined Declaration and Power of Attorney
4. 4 sheets of drawings (copies)
5. \$760.00 filing fee
6. Return postcard
7. Certificate of Mailing By Express Mail

relating to the above application, were deposited as "Express Mail", Mailing Label No. EL415726719US with the United States Postal Service, addressed to Box PATENT APPLICATION, the Assistant Commissioner for Patents, Washington, D.C., 20231, December 3, 1999

December 3, 1999
Date

Earl C. Hancock
Mailer

3 DECEMBER 1999
Date

Earl C. Hancock
Earl C. Hancock
Reg. No. 19,472
Attorney for Applicant
HOLLAND & HART LLP
555-17th Street, Suite 3200
Post Office Box 8749
Denver, Colorado 80201
(303) 473-2708

BACKGROUND OF THE INVENTION

5 The present invention relates to apparatus and methods for indicating the quality of received signals. The present invention is particularly useful in conjunction with mobile telephones or cell-phones.

10 A conventional mobile phone typically displays the channel signal strength information, such as by presenting a vertical bar or horizontal bar. The amount so displayed is based upon the current channel Received Signal Strength (RSSI). There is a problem with such displays in that the RSSI does not reflect anything about the channel quality for the user.

Even when the RSSI is indicated as very good, the user can experience
15 degenerated call quality because of interference, etc., despite an acceptable
quantity of RSSI. Further, with no indication that the signal quality has
deteriorated or is unacceptable, the user might erroneously conclude that there
is a problem with the phone unit instead of a loss of acceptable received signal
quality.

The quality of a received signal is detected. The results of this detection are presented to the user as by any one or more of a variety of indicators. For example, blinking signal strength displays could indicate the channel quality. An audible alert could be employed as could text on the display, a vibrating indicator, an icon, indicator lights including variable intensity and/or variable color displays, and the like.

Also audio signal quality could be used for the same purpose; namely, an indication of the extent of distortion of the signal.

The method of this invention indicates the quality of a received signal at a mobile phone which a signal is received from a remote transmitter. This
5 received signal is inspected to determine its quality. An output correlated to the results of said inspecting step is then provided in the form of a user discernible indication in response to that output.

This inspecting step can include the step of comparing the received signal with a predetermined threshold. Further, the providing step can include
10 the step of generating a first output whenever the comparing step has met the aforesaid threshold and for otherwise generating a second output different from that first output.

The present invention is useful in conjunction with a digital transmission and receiving system wherein the inspecting step can include the step of
15 determining the BER of the received signal over a predetermined sampling period. It is also possible to ensure that the received signal has failed to meet the threshold value for a predetermined time-out period before generating the output indicative of such a failure.

It is particularly useful for the providing step to include the step of
20 establishing a visual indicator for the user discernible indication although a variety of user-sensible indicators are possible.

Apparatus in accordance with this invention provides an indication of the quality of a received signal at a mobile phone. A signal receiving antenna on the mobile phone receives signals transmitted from a remote location. A
25 signal quality determining arrangement in the mobile phone is coupled for inspecting this received signal, and provides an output signal indicative thereof. A user-discernible indication generator is then operable in response to this output signal.

This signal quality determining arrangement can include a comparator device coupled for comparing the received signal with a predetermined threshold. The comparator generates a first output whenever the received signal has met the threshold level while otherwise generating a second output
5 different from the first output. The apparatus is useful in conjunction with a digital transmission and receiving system. In this case, it typically can include a BER measuring device operable over a selected sampling period.

The apparatus can further include a time-out circuit coupled between the signal quality measuring arrangement and the user discernible signal
10 generator for ensuring that the received signal has maintained its measured level relative to this threshold value for a predetermined period before generating the user discernible output.

The foregoing and other features, utilities and advantages of the invention will be apparent from the following more particular description of a preferred embodiment of the invention as illustrated in the accompanying
15 drawings.

BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 is a block diagram of the operation of one embodiment of the present invention.

20 FIGURE 2 is a view of a typical mobile phone display suitable for use in conjunction with the present invention.

FIGURE 3 is a block diagram of the elements associated with a mobile telephone incorporating the present invention.

25 FIGURE 4 is a flowchart illustrating one embodiment of the present invention.

FIGURE 5 is a flowchart of the quality decision elements of FIG. 4.

FIGURE 6 is a block diagram of a signal quality indication system based upon an audio quality measurement.

FIGURE 7 is a more detailed diagram of the audio quality measurement element of FIG. 6.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates the primary function of the present invention wherein
 5 a received communication signal 10 is inspected and a signal quality decision
 12 is reached relative to that signal. In the presence of a transmitted signal 10
 which is of an acceptable quality, a normal signal indicator 14 is actuated.
 Conversely, if the received signal 10 is below a minimum quality threshold, an
 inferior signal indicator 15 is enabled or actuated.

10 For example, the present invention can operate in conjunction with a
 display 20 contained on a mobile phone or cell-phone. In this display, a series
 of bars 21, 22 and 23 along the left side reflect various signal strength
 indications. Whenever the signal quality decision 12 in an active digital mode
 determines that the Bit Error Rate (BER) is at or near 0.0%, indicators bars
 15 21-23 on the left side are shown constant without blinking. If the signal
 quality deteriorates such that the BER drops below a minimum value such as a
 BER greater than 4%, left indicators 21-23 are caused to start blinking. The
 initiation of the blinking can occur after a preselected time-out such as 0.5
 seconds, for example.

20 When the display begins blinking, or otherwise indicating that the
 received signal quality has deteriorated, the user can take steps to improve the
 received signal quality. For instance, the user can change the position of the
 mobile phone while monitoring the display. If the signal quality improves
 adequately, the user will observe that the blinking has stopped and the signal
 25 bar is shown constantly on the display. Otherwise, the blinking will continue.
 Note that the quality indication is possible through other means such as
 audible, textual or vibratory arrangements, or any combination thereof.

Note further that the rate of blinking can be adjusted in steps from constant display without blinking for clear or minimally reduced signal quality to a rapid blinking for unacceptable quality. Blinking rates between those two boundary conditions can be proportioned to the magnitude of the signal quality deterioration. It is likewise preferable to employ a time-out before a poor quality indication is presented. This would prevent an erroneous quality deterioration display or signal in response to a transient received signal aberration.

The present invention is also useful in conjunction with an analog mode control channel. All incoming messages include a Cyclic Redundancy Check (CRC) repeated five times. This can include the analog signal. The quality indicator can be determined by the number of correct CRC's are received. For an analog voice channel, the Supervisory Audio Tone (SAT) can be used to monitor channel quality in that it is possible to measure the SAT signal level

For both the digital mode control channel and the digital mode traffic channel, the BER is useful in determining channel quality.

In FIG. 1, normal signal indicator 14 reflects a situation wherein channel quality is good. The poor or inferior signal indicator 15 refers to a situation where the signal quality is weak or unacceptable. For instance, the poor signal criteria may be said to exist whenever BER is greater than 4% for a duration of one second, whereas good quality can be said to exist if the BER remains less than 1% for one second. The exact values for criteria can be determined on a case-by-case basis.

The present invention gives the user an easily deciphered indication of signal quality. In the prior art, while the user receives an indication of signal quantity, the user does not get an indication of received signal quality. Thus, the user of a prior art mobile phone is as likely to conclude that deteriorated speech quality is a function of a malfunction of the phone when the fault lies with the communication network. Thus, the present invention facilitates trouble analysis by the user.

FIG. 3 is a block diagram of a mobile telephone, or cellphone 30, modified to incorporate the present invention. Signal source 32 transmits a radio frequency signal 31 which is detected by receiver 35 of phone 30. That signal is handled by conventional circuitry (not shown) in the phone to produce
5 an audible and/or visible signals for the user.

The signal produced by receiver 35 is monitored by quality detector 38. For a digital system, quality detector 38 could inspect the BER over predetermined sampling periods to produce a signal to display controls 40 thereby actuating the display 42. This conveys a human discernible signal,
10 such as a flashing display, warning light actuation, audible tone, or any suitable output to the user.

An embodiment of the process for operating with both digital and analog systems is shown in the flowchart of FIG. 4. Upon power up 45 of the apparatus, a determination 46 is made as to the phone operating mode. Thus,
15 if an analog voice channel is determined to be present, branch 48A is enabled. The presence of an analog control channel signal enables branch 48B whereas digital voice and control channels are enabled through branches 48C and 48D, respectively.

Each branch proceeds with a quality measurement process 49. Thus, for
20 the analog voice channel, a SAT measurement 50A is made. For analog control, the CRC measurement 50B is performed while the digital BER acceptability for either of the two digital channels is determined in blocks 50C and 50D. In all four cases, a decision 52 is made as to whether the quality of the received signal is good or not good. A normal signal indicator 54 is
25 enabled in the former situation whereas an inferior signal indicator 56 is enabled for the latter.

A time out function in elements 50 are for the purpose of ensuring that the detected condition has persisted long enough to be considered a valid indication. Thus, if the signal has persisted for a long enough period, a "yes"
30 output causes the appropriate display indication 60. Conversely, failure of the

signal to persist throughout the time-out period causes enablement of return 62 to recycle the process. A similar result is produced after enabling the indication at 60 after it is sensed that another sampling cycle should be initiated.

- 5 For an analog system, the SAT might typically be a 5470 Hz, 6000 Hz or 6030 Hz tone transmitted by the base station.

A typical quality decision 50 within block 49 of FIG. 4 is shown in greater detail in FIG. 5. The signal is received at 47 as enabled by detector 48. It is compared against a predetermined level and either a good, or a not-good
10 output is produced. If the quality of the signal is below the predetermined level, a decision 65 is then made as to whether this signal condition has remained below the predetermined minimum level for a specified amount of time. If it has, then the decision is made that a "not good" signal quality
15 minimum, it is presumed that a "good" condition exists, and that output is so indicated. The inverse decision process is provided by 66.

FIG. 6 is a block diagram of a signal quality indication system based upon an audio quality measurement, while FIG. 7 is a more detailed diagram of the audio quality measurement element of FIG. 6. In this embodiment, a phone
20 mode determination is initially provided to indicate either digital or analog control output signal 71 is to be introduced to block 72, or a digital or analog voice signal at 73 is to be introduced to voice channel 74.

In the FIG. 6 system, the voice channel signal quality is measured at block 75 which is shown in greater detail in FIG. 7. As described previously
25 herein, the decision results in either a good output 91, or a bad output 92. The former enables the normal signal quality indicator 76, while the latter enables the inferior signal indicator 77. A time-out function is once again employed to ensure that the signal condition is maintained for more than a transient period of time.

In FIG. 7, the current audio status element 84 determines whether the audio distortion is above or below a predetermined level. If so, output 85A is introduced to element 86 which determines whether this condition has existed for at least a preselected period of time. In this case, a good output 91 is
5 produced.

Conversely, if this distortion has existed above the selected limit for a specified period of time, not good output 92 is raised indicating an unacceptable amount of distortion. Once again, failure of the distortion level to remain above the specified level of the selected period of time raises the
10 presumption that the distortion was merely a transient.

Note that production of an inferior signal indicator, such as at 77 in FIG. 6, can be supplemented with an indicator of the magnitude of inferiority if desired. By way of example, if indicator 77 produces an output that suggests a signal quality is some percentage of acceptable, the indicator output can be
15 arranged to so indicate. As a further example, if an unacceptable quality is reflected by a light that blinks at X cycles per minute, a determination that the quality measurement is half that amount could produce X/2 cycles per minute of blinking. Of course, a solid number display could actually present numbers representative of the amount of quality or distortion actually measured.
20 Furthermore, controlled gray scaling of a display can be employed as a quality level indicator.

While the invention has been particularly shown and described with reference to a preferred embodiment thereof, it will be understood by those skilled in the art that various other changes in the form and details may be
25 made without departing from the spirit and scope of the invention.

What is claimed is:

CLAIMS

1. The method of indicating the quality of a received signal at a mobile phone comprising the steps of:

receiving a signal from a remote transmitter at the mobile phone;

inspecting said received signal for determining its quality;

5 providing an output correlated to the results of said inspecting step; and
providing a user discernible indication in response to said output.

2. The method in accordance with claim 1 in which said inspecting step includes the step of comparing said received signal with a predetermined threshold, and

said providing step includes the step of generating a first output
5 whenever said comparing step has met said threshold and for otherwise
generating a second output different from said first output.

3. The method in accordance with claim 2 for use in conjunction with a digital transmission and receiving system wherein said inspecting step includes the step of determining the BER of said received signal over a sampling period.

4. The method in accordance with claim 3 which includes the step of ensuring that said received signal has failed to meet said threshold value for a predetermined time-out period before generating the said output indicative of such a failure.

5. The method in accordance with claim 1 wherein said providing step includes the step of establishing a visual indicator for said user discernible indication.

6. The method of indicating the quality of a received signal at a mobile phone comprising the steps of:

receiving a signal from a remote transmitter at the mobile phone;

separating control signals from voice signals;

5 inspecting said received voice signal for determining its quality is at least either above or below a predetermined threshold;

providing an output correlated to the results of said inspecting step;
and

providing a user discernible indication in response to said output.

7. The method in accordance with claim 6 wherein said inspecting step includes the step of quantifying the amount by which said audio signal fails to meet said predetermined threshold, and

5 said user discernible indication step includes the step of correlating the amount of said user discernible indication to the result of said quantifying step.

8. The method in accordance with claim 6 wherein said user discernible providing step includes the step of causing a visible display to pulsate.

9. The method of claim 8 wherein the amount of said display pulsation is correlated to the amount said received voice signal departs from said predetermined threshold level.

10. The method in accordance with claim 6 wherein said user discernible providing step includes the step of causing a user discernible audio signal indicating the voice signal quality.

12. The method in accordance with claim 6 which includes the step of ensuring that the results of said inspecting step have remained over a preselected time-out period before generating the said user discernible indication.

13. Apparatus for indicating the quality of a received signal at a mobile phone comprising:

a signal receiving antenna on the mobile phone for receiving signals transmitted from a remote location;

5 a signal quality determining arrangement in said mobile phone coupled for inspecting said received signal and providing an output signal indicative thereof; and

a user discernible indication generator operable in response to said output signal.

14. Apparatus in accordance with claim 13 in which said signal quality determining arrangement includes a comparator coupled for comparing said received signal with a predetermined threshold, said comparator generating a first output whenever said received signal has met said threshold
5 and for otherwise generating a second output different from said first output.

15. The apparatus in accordance with claim 14 for use in conjunction with a digital transmission and receiving system which includes a BER measuring device operable a selected sampling period.

16. The apparatus in accordance with claim 13 which includes a time-out circuit coupled between said signal quality measuring arrangement and said generator for ensuring that said received signal has maintained its measured level relative to said threshold value for a predetermined period
5 before generating the said user discernible output.

SIGNAL QUALITY INDICATOR APPARATUS AND METHOD
PARTICULARLY USEFUL FOR MOBILE TELEPHONES

ABSTRACT OF THE DISCLOSURE

5 The quality of radio frequency signals received at a mobile phone or
cellphone is sampled. The results are employed to produce a human
discernible indication such as by blinking a received signal strength bar on a
display. The bar remains constant without blinking if the signal quality is at or
below a preselected minimum and can have the blinking rate increase as the
10 sensed signal quality decreases. Distortion can be determined in either the
digital or analog mode. Digital signal quality can be reflected in the sensed bit
error rate while the level of analog signal quality can be determined from the
supervisory audio tone. .

15 BOULDER:0129909.01

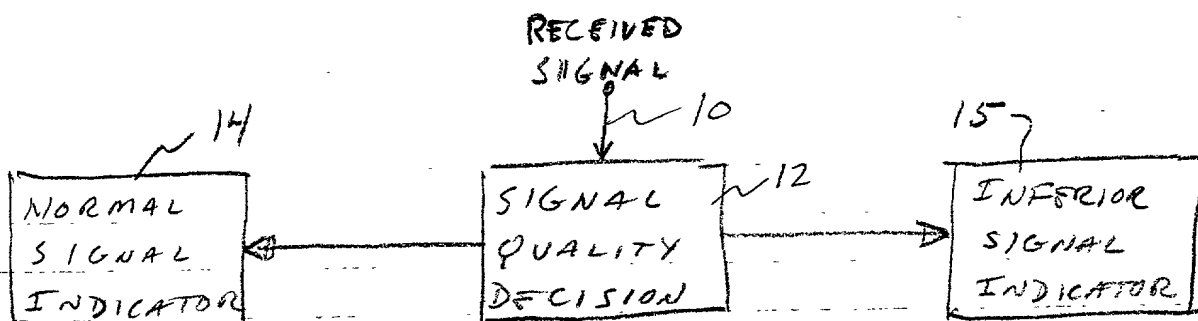


FIG. 1

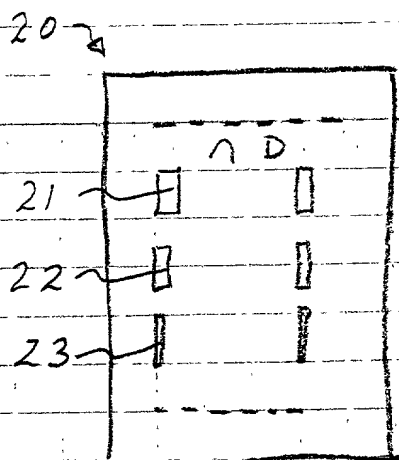


FIG. 2

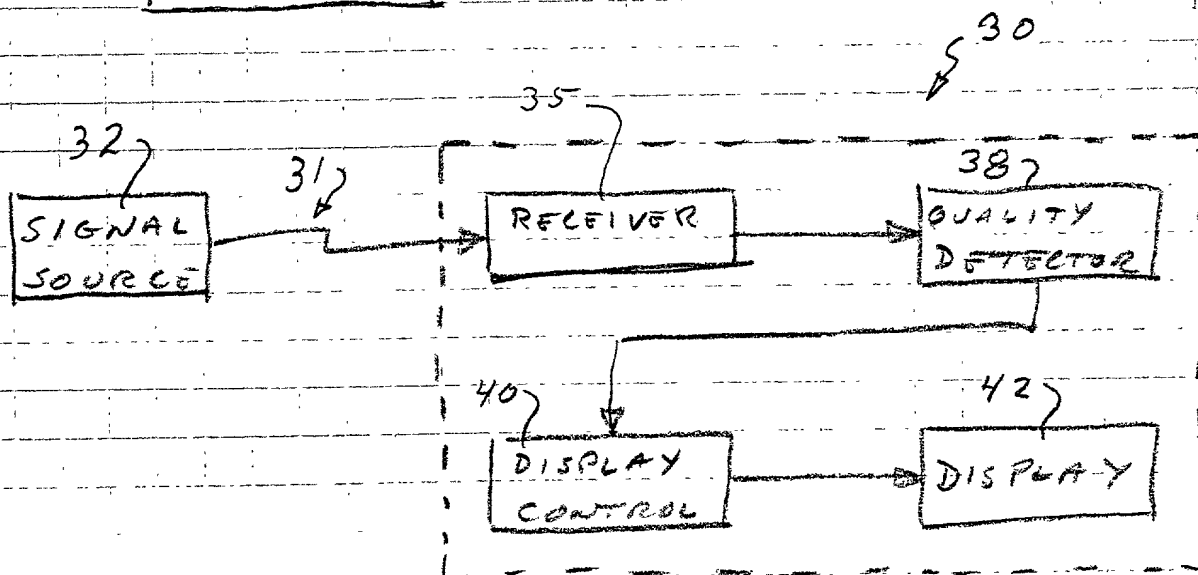


FIG. 3

POWER UP
~45

DETERMINE PHONE
OPERATING MODE ~46

48A) ANALOG VOICE CHANNEL
48B) ANALOG CONTROL CHANNEL
48C) DIGITAL VOICE CHANNEL
48D) DIGITAL CONTROL CHANNEL

49-
~47A MEASURE SAT
~47B MEASURE CRC
~47C MEASURE BER
~47D MEASURE BER

52
GOOD?
YES NO

NORMAL
SIGNAL
INDICATOR ~54

56 ~ INFERIOR
SIGNAL
INDICATOR

~62

60
PRESENT
INDICATION

FIG. 4



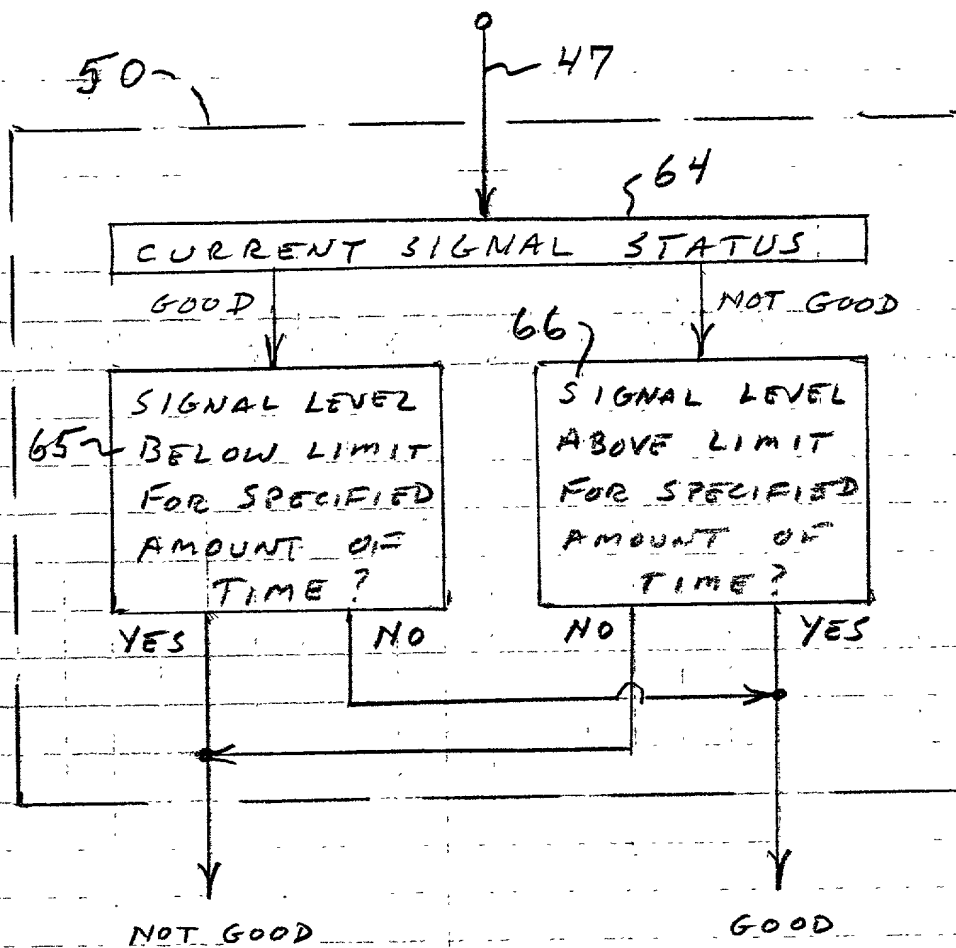


FIG. 5

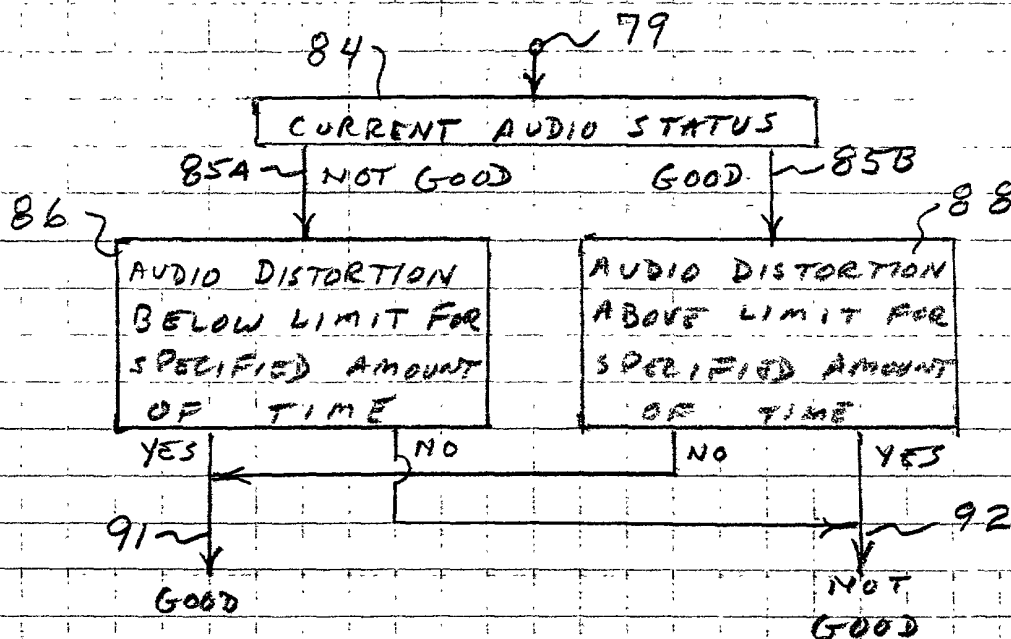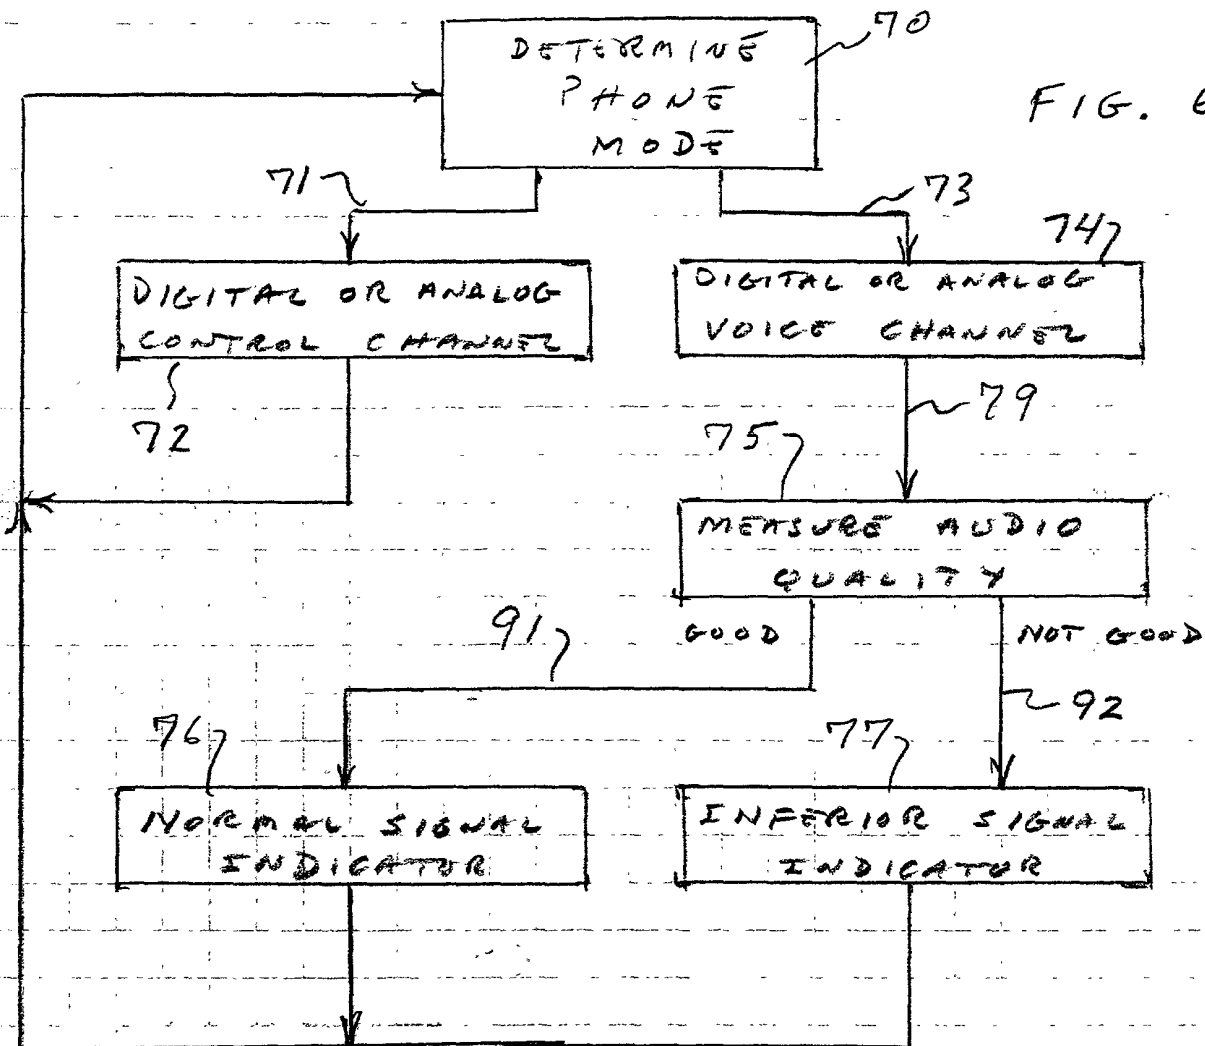

COMBINED DECLARATION AND POWER
OF ATTORNEY FOR PATENT APPLICATION

DECLARATION:

As below named inventor, I hereby declare that:

My residence, post office addresses and citizenship are as stated below next to my name.

I believe I am the original, first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled SIGNAL QUALITY INDICATOR APPARATUS AND METHOD PARTICULARLY USEFUL FOR MOBILE TELEPHONES, the specification of which is filed concurrently herewith.

The person named as inventor in this application is JORMA ANTERO SEPPANEN.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

No prior foreign application for patent or inventor's certificate has been filed.

No priority claim is made under 35 U.S.C. § 119 or 35 U.S.C. § 120.

POWER OF ATTORNEY:

As named inventor, I hereby appoint Francis A. Sirr, Reg. No. 17,265, Earl C. Hancock, Reg. No. 19,472, Lee R. Osman, Reg. No. 38,260, James A. Pinto, Reg. No. 40,774, Robert G. Crouch, Reg. No. 34,806, Robert H. Kelly, Reg. No. 33,922, Patrick McBride, Reg. No. 39,295, and Brian P. Kinnear, Reg. No. 43,717 to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Send all correspondence to: Earl C. Hancock, HOLLAND & HART^{LLP}, 555 17th Street, Suite 3200, P.O. Box 8749, Denver, Colorado 80201, and direct telephone calls to Earl C. Hancock, telephone number 303-473-2708.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

| | |
|--|--|
| Inventor's Full Name: | JORMA ANTERO SEPPANEN |
| Inventor's Signature: | |
| Date: | |
| Residence: (City, State and/or country) | 1130 Hidden Ridge #2172 Irving, Texas 75038 |
| Citizenship: | Finland |
| Post Address Office: | Same As Residence |